







■ Features

- · Constant Current mode output
- Plastic housing with Class II design
- · Built-in active PFC function
- · Class 2 power unit
- IP67 rating for indoor or outdoor installations
- Function: 3 in 1 dimming
- Typical lifetime>50000 hours
- 5 years warranty


■ Applications

- · LED panel lighting
- · LED downlight
- · LED decorative lighting
- · LED tunnel lighting
- · Moving sign

Description

LPF-60D series is a 60W AC/DC LED driver featuring the constant current output. LPF-60D operates from $90 \sim 305$ VAC and offers models with different rated voltage ranging between 12V and 54V. Thanks to the high efficiency up to 90%, with the fanless design, the entire series is able to operate for $-40\,^{\circ}\text{C} \sim +80\,^{\circ}\text{C}$ case temperature under free air convection. The entire series is rated with IP67 ingress protection level and is suitable to work for a variety of applications at dry, damp or wet locations. LPF-60D is equipped with the 3 in 1 dimming function so as to provide the design flexibility for LED lighting system.

■ Model Encoding

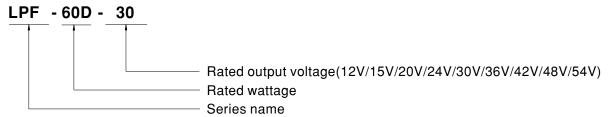

60W Constant Current Mode LED Driver

LPF-60D series

SPECIFICATION

DC VOLTAGE RATED CURRENT	12V								
RATED CURRENT		15V	20V	24V	30V	36V	42V	48V	54V
	5A	4A	3A	2.5A	2A	1.67A	1.43A	1.25A	1.12A
RATED POWER Note.5	60W	60W	60W	60W	60W	60.12W	60.06W	60W	60.48W
CONSTANT CURRENT REGION Note.2	7.2~12V 9~15V 12~20V 14.4~24V 18~30V 21.6~36V 25.2~42V 28.8~48V 32.4~5								
CURRENT RIPPLE	5.0% max. @rated current								
CURRENT TOLERANCE	±5.0%								
SETUP, RISE TIME Note.6	1000ms, 80ms / 115VAC 500ms, 80ms / 230VAC								
HOLD UP TIME (Typ.)	16ms/230VAC 16ms/115VAC								
VOLTAGE RANGE Note.5	90 ~ 305VAC 127 ~ 431VDC (Please refer to "STATIC CHARACTERISTIC" section)								
FREQUENCY RANGE	47 ~ 63Hz								
POWER FACTOR	PF≥0.97/115VAC, PF≥0.95/230VAC, PF≥0.92/277VAC@full load (Please refer to "POWER FACTOR (PF) CHARACTERISTIC" section)								
TOTAL HARMONIC DISTORTION	THD<20%(@load≧60%/115VC,230VAC; @load≧75%/277VAC) (Please refer to "TOTAL HARMONIC DISTORTION(THD)" section)								
EFFICIENCY (Typ.)	86%	87%	88%	89%	90%	90%	90%	90%	90%
AC CURRENT	0.8A / 115VAC								
INRUSH CURRENT(Typ.)	COLD START 55A(twidth=270µs measured at 50% Ipeak) at 230VAC; Per NEMA 410								
MAX. No. of PSUs on 16A CIRCUIT BREAKER	8 units (circuit breaker of type B) / 14 units (circuit breaker of type C) at 230VAC								
LEAKAGE CURRENT	<0.75mA / 240VAC								
	95 ~ 108%								
OVER CURRENT	Constant current limiting, recovers automatically after fault condition is removed								
SHORT CIRCUIT	Hiccup mode	, recovers auto	matically after	fault condition	is removed.				
	15 ~ 17V			28 ~ 35V	34 ~ 40V	41 ~ 49V	46 ~ 54V	54 ~ 63V	59 ~ 66V
OVER VOLTAGE	Shut down o	l .		cover					-
OVER TEMPERATURE									
WORKING TEMP.									
MAX. CASE TEMP.	Tcase=+80°C								
WORKING HUMIDITY	20 ~ 95% RH non-condensing								
· ·									
VIDICATION									
SAFETY STANDARDS Note.8	J61347-1, J61347-2-13, GB19510.1, GB19510.14 approved; design refer to UL60950-1, TUV EN60950-1								
WITHSTAND VOLTAGE	I/P-0/P:3.75KVAC								
	-				•		-	V),E/(O 11 10	020
		_ ` ,	CUFT						
All parameters NOT specially Please refer to "DRIVING M Ripple & noise are measured Tolerance: includes set up to De-rating may be needed ur Length of set up time is mea The driver is considered as a complete installation, the fina To fulfill requirements of the without permanently connec	y mentioned as ETHODS OF at 20MHz of be derance, line re- nder low input asured at first of a component to all equipment in latest ErP registed to the mai life expectance	re measured a LED MODULE andwidth by us gulation and lo voltages. Plea sold start. Turn hat will be open anufacturers ulation for light ns. by of >50,000 l	at 230VAC inpute: ". sing a 12" twist and regulation. se refer to "ST ing ON/OFF the arated in combination fixtures, this hours of opera	ed pair-wire ter ATIC CHARAGE THE driver may I Ination with finate EMC Directive The control of the control The co	minated with a CTERISTIC" si lead to increas al equipment. Si e on the comp an only be use se, particularly	0.1uf & 47uf p ections for det- e of the set up Since EMC pe lete installation ed behind a sv	arallel capacito ails. time. rformance will again. vitch	be affected by	
	SETUP, RISE TIME Note.6 HOLD UP TIME (Typ.) VOLTAGE RANGE Note.5 FREQUENCY RANGE POWER FACTOR TOTAL HARMONIC DISTORTION EFFICIENCY (Typ.) AC CURRENT INRUSH CURRENT(Typ.) MAX. No. of PSUS on 16A CIRCUIT BREAKER LEAKAGE CURRENT OVER CURRENT SHORT CIRCUIT OVER VOLTAGE OVER TEMPERATURE WORKING TEMP. MAX. CASE TEMP. WORKING HUMIDITY STORAGE TEMP., HUMIDITY TEMP. COEFFICIENT VIBRATION SAFETY STANDARDS Note.8 WITHSTAND VOLTAGE ISOLATION RESISTANCE EMC EMISSION Note.8 EMC IMMUNITY MTBF DIMENSION PACKING 1. All parameters NOT specialit 2. Please refer to "DRIVING M 3. Ripple & noise are meaded ur 6. Length of set up time is mea 7. The driver is considered as a complete installation, the fina 8. To fulfill requirements of the without permanently connec 9. This series meets the typical 10. Please refer to the warranty	HOLD UP TIME (Typ.) VOLTAGE RANGE Note.5 POWER FACTOR FREQUENCY RANGE TOTAL HARMONIC DISTORTION AC CURRENT INRUSH CURRENT(Typ.) MAX. No. of PSUs on 16A CIRCUIT BREAKER LEAKAGE CURRENT OVER CURRENT Hiccup mode TOVER VOLTAGE OVER TEMPERATURE WORKING TEMP. MAX. CASE TEMP. WORKING HUMIDITY STORAGE TEMP., HUMIDITY TEMP. COEFFICIENT VIBRATION SAFETY STANDARDS Note.8 EMC IMMUNITY MTBF DIMENSION PACKING 1. All parameters NOT specially mentioned a 2. Please refer to red without permanents of the latest ErP reg without permanents connected to the main 9. This series meets the typical life expectance 10. Please refer to the warra	SETUP, RISE TIME Note.6 1000ms, 80ms / 115VAC HOLD UP TIME (Typ.) 16ms/230VAC 16ms/230VAC 127 ~ 43 (Please refer to "STATIC CHERCY RANGE 47 ~ 63Hz POWER FACTOR PF≥ 0.97/115VAC, PF≥ 0.9 (Please refer to "POWER FACTOR PF≥ 0.97/115VAC, PF≥ 0.9 (Please refer to "TOTAL HARMONIC DISTORTION PF≥ 0.97/115VAC, PF≥ 0.9 (Please refer to "TOTAL HARMONIC DISTORTION THD < 20% (@load≥60%/11 (Please refer to "TOTAL HARMONIC DISTORTION Row Row	SETUP, RISE TIME Note.6 1000ms, 80ms / 115VAC 500ms, 80ms HOLD UP TIME (Typ.) 16ms/230VAC 16ms/115VAC 16ms/115VAC	SETUP, RISE TIME Note.5 HOLD UP TIME (Typ.) 16ms/230VAC 16ms/115VAC 90 ~ 305VAC 127 ~ 431VDC (Please refer to "STATIC CHARACTERISTIC" section) FREQUENCY RANGE 47 ~ 631L POWER FACTOR PF≥ 0.97/115VAC, PF≥ 0.95/230VAC, PF≥ 0.92/27TVAC (Please refer to "POWER FACTOR (PF) CHARACTERISTIC" TOTAL HARMONIC DISTORTION THD> 20% (@load≥60%/115VC.230VAC; @load≥75%/ (Please refer to "TOTAL HARMONIC DISTORTION(THI EFFICIENCY (Typ.) 86% 87% 88% 89% AC CURRENT 0.8A/115VAC 0.4A/230VAC 0.32A/27TVAC INRUSH CURRENT(Typ.) COLD START 55A(twidth=270µs measured at 50% lpeak AC RICUIT BREAKER LEAKAGE CURRENT OVER CURRENT Hiccup mode, recovers automatically after fault Hiccup mode, recovers automatically after fault Hiccup mode, recovers automatically after fault 15 - 17V 17.5 ~ 21V 23 ~ 27V 28 ~ 35V Shut down o/p voltage, re-power on to recover WORKING TEMP. TCass=~40 ~ +80°C (Please refer to "OUTPUT LOAD vs.1 TEMP. COEFFICIENT VIBRATION 10 ~ 500Hz, 5G 12min/Lycle, period for 72min. each all UL8750, CSA C22.2 No. 250.0-08, ENEC EN61347-1, EN61 J61347-1, J61347-2-13, GB19510.1, GB19510.14 approx WITHSTAND VOLTAGE IMPO-PP.3.75KVAC SOLUTION RESISTANCE I/P-O/P.9.3.75KVAC EMC EMISSION Note.8 EMC EMISSION Note.8 Compliance to EN55015, EN61000-3-2 Class C (@load≥ EMC EMISSION Note.8 Compliance to EN55015, EN61000-3-2 Class C (@load≥ EMC EMISSION Note.8 EMC EMISSION Note.8 Compliance to EN55015, EN61000-3-2 Class C (@load≥ EMC EMISSION Note.8 EMC EMISSION Note.8 Compliance to EN55015, EN61000-3-2 Class C (@load≥ EMC EMISSION Note.8 Compliance to EN55015, EN61000-3-2 Class C (@load≥ EMC EMISSION Note.8 EMC	SETUP, RISE TIME	SETUP, RISE TIME Note	SETUP, RISE TIME Note.6 1000ms, 80ms / 115VAC 500ms, 80ms / 230VAC 16ms/115VAC 16ms/1315VAC 16ms/1315VAC 1000ms, 80ms / 230VAC 1000ms, 80ms / 2	100 11 15 15 15 16 16 16 16


12. For any application note and IP water proof function installation caution, please refer our user manual before using.

https://www.meanwell.com/Upload/PDF/LED_EN.pdf




■ BLOCK DIAGRAM

fosc: 100KHz

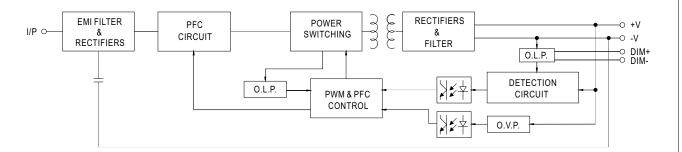

■ DRIVING METHODS OF LED MODULE

 $\ensuremath{\mathbb{X}}$ This series works in constant current mode to directly drive the LEDs.

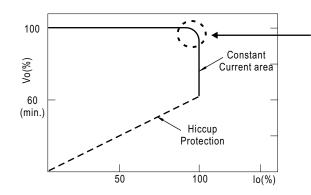

Typical output current normalized by rated current (%)

In the constant current region, the highest voltage at the output of the driver depends on the configuration of the end systems.

Should there be any compatibility issues, please contact MEAN WELL.




■ DIMMING OPERATION

\divideontimes 3 in 1 dimming function




- · Output constant current level can be adjusted by applying one of the three methodologies between DIM+ and DIM-: 1 ~ 10VDC, or 10V PWM signal or resistance.
- Direct connecting to LEDs is suggested. It is not suitable to be used with additional drivers.
- Dimming source current from power supply: $100\mu A$ (typ.)
- O Applying additive 1 ~ 10VDC

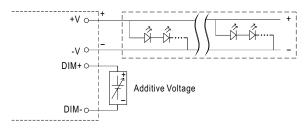


"DO NOT connect "DIM- to -V"

O Applying additive 10V PWM signal (frequency range 100Hz ~ 3KHz):

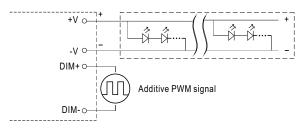



"DO NOT connect "DIM- to -V"


O Applying additive resistance:

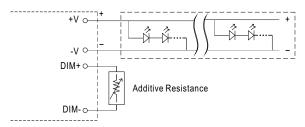

"DO NOT connect "DIM- to -V"











Note: In the case of turning the lighting fixture down to 0% brightness, please refer to the configuration as follow, or please contact MEAN WELL for other options.

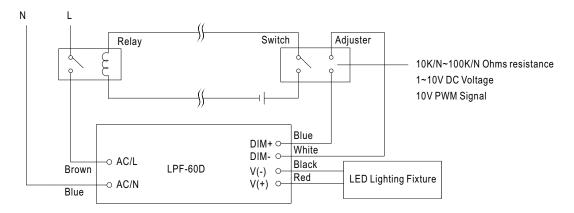


Using a switch and relay can turn ON/OFF the lighting fixture.



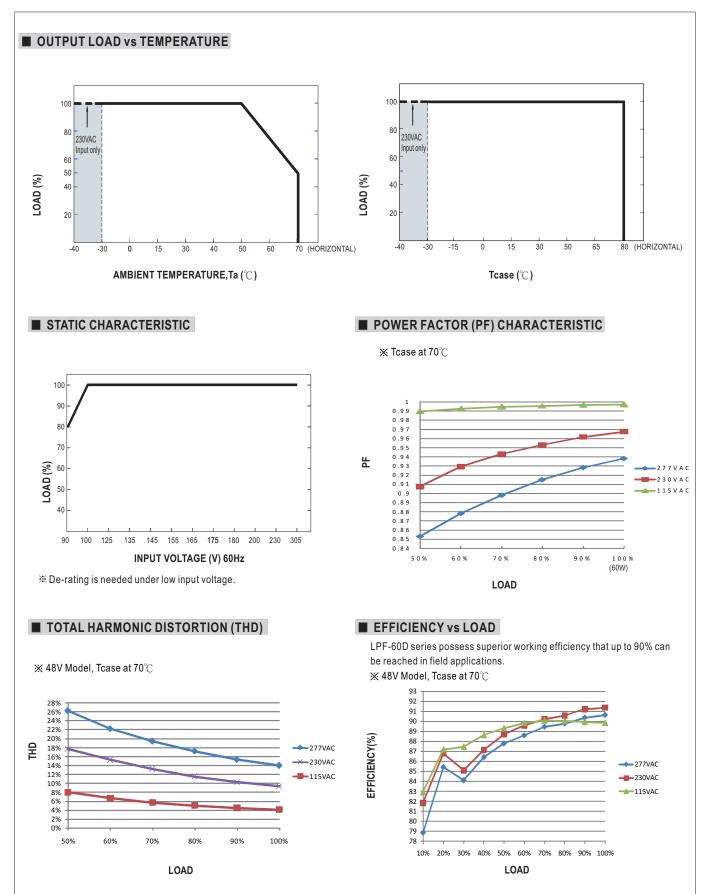



■ LIFE TIME

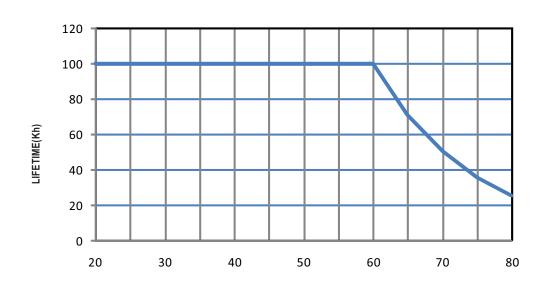


Tcase ($^{\circ}\!\mathbb{C}$)



■ MECHANICAL SPECIFICATION

CASE NO.: LPF-60B Unit:mm

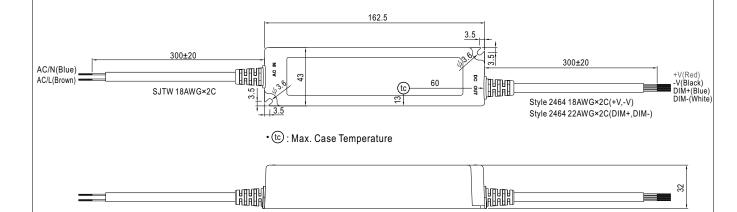

■ Recommend Mounting Direction



■ INSTALLATION MANUAL

Please refer to : http://www.meanwell.com/manual.html